


L9 Series

LCD Smart Light Switch User' Manual



works with
Google Assistant

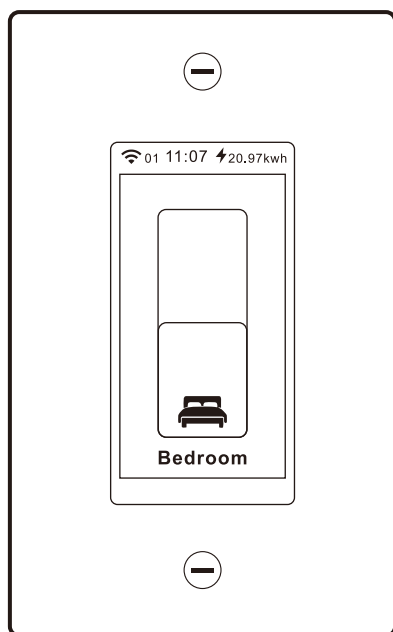

WORKS WITH
amazon alexa

**This product is compatible with
Google Home & Amazon Echo**

Contents

1.Product introduction.....	01
2.Product parameters.....	02
3.Main interface.....	03
4.Structure size.....	04
5.Wiring diagram.....	05
6.Download and register the Smart Living APP.....	06
7.How to enter the system menu?.....	07
8.How to configure switch?.....	08-09
9.How to set a password to enter the setting interface?.....	10
10.How to set schedule and timer?.....	11
11.How to set up power statistics?.....	12
12.How to set the button name and icon?.....	13
13.How to change the button color?.....	14
14.How to change the switch background map?.....	15
15.How to set the sensing radar working mode?.....	16
16.How to change the screen brightness?.....	17
17.How to set up energy -saving mode?.....	18
18.How to upgrade firmware?.....	19
19.How to set up the state before power outage?.....	20
20.How to restore the factory setting?.....	21
21.How to set 2/3 way switching control setting?.....	22
22.How to connect Alexa?.....	23
23.How to connect Google home?.....	24
24.Please contact us for any help.....	25
25.Manufacturer.....	25

1.Product introduction

It is an innovation LCD smart light switch specifically targeted at the US market.(The smart switch makes full use of WiFi Mesh network technology, continuously optimizing network signals according to the device's location to provide the best experience, which is especially suitable for families that need a larger number of smart switches.)

Please keep this manual for future reference.

2.Product parameters

Name: LCD smart light switch

Model: L9-HS

Operating voltage: AC120V~50-60Hz

Load power: 200W

Load type: Incandescent lamp, energy saving lamp, fluorescent

Wireless standards: IEEE 802.11b/g/n

Operating temperature: -25 °C +60 °C

Size: 69mm*113mm*45mm

Packing box size: 102.6x141x51.1mm

Panel: Tempered Crystal Glass

Bottom materials: Retardant PC




3.Main interface

LCD smart light switch




- ① WiFi, “White” connected, “Red” not connected.
- ② Total number of devices in the mesh network
- ③ Current time
- ④ Power or the statistics of electricity consumption
- ⑤ Turn On/OFF
- ⑥ Light name

4.Structure size

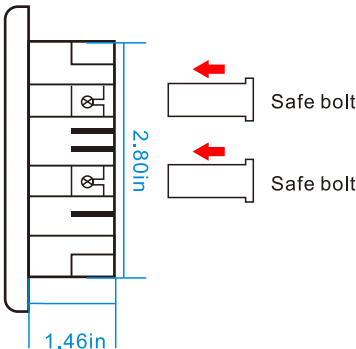

5.Wiring diagram

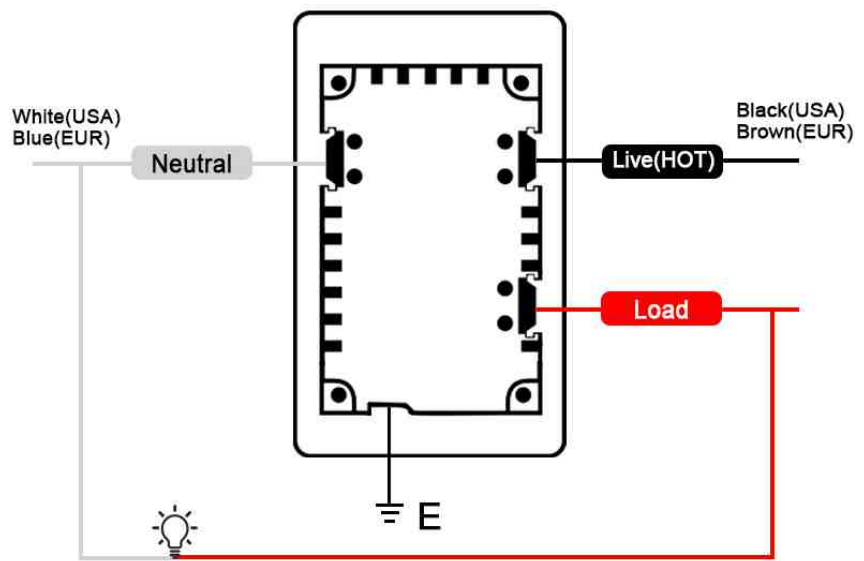

6.Download and register the Smart Living APP

1. Scan the QR code below with your mobile phone to download the Smart living APP



2. Choose the system




3. Register your account with mobile number or email ID




Click to Sign Up


4. Enter mobile phone email



5. Enter the verification code.

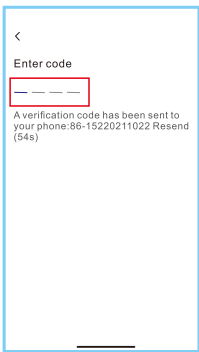


6. Enter 6-digit password

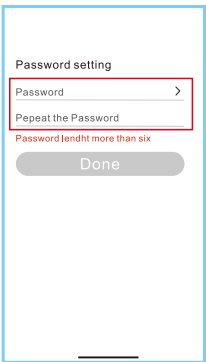


7.How to enter the system menu?

A. Long press for 3 seconds

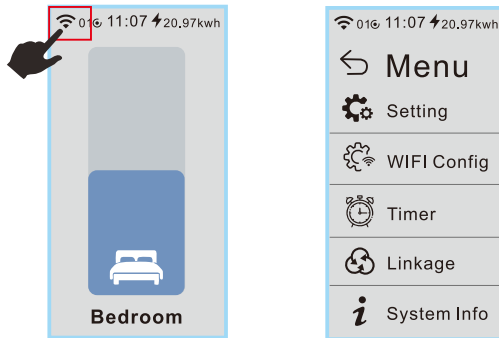

B. Enter password (Default password 666666)

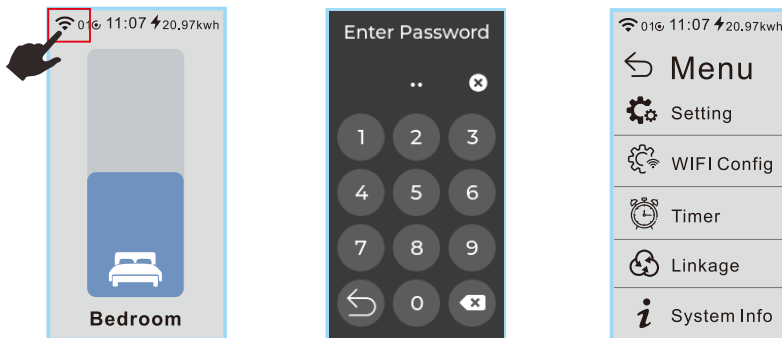


8.Configure switches to Smart Living APP

(Note, this step should be after account registration)



A.First time configuration

- A1.Select device type A2.Find and open switch QR code A3. Success




B.Not first time configuration


- B1. Long press for 3 seconds B2. Click "WIFI Config" B3. Find and open switch QR code





8. Configure switches to Smart Living APP (Note, this step should be after account registration)

- Click +


- Choose L8



- Create a new network


- Enter the network name



- Enter the WiFi SSID and password




Enter WiFi SSID
Input password
- Start with the switch closest to the router and increase the distance for other switches



NOTE
Please set the device **closest** to the router as the **first device** configuration, and then use the **first device** as the center of the circle, and configure other devices in order from **near to far**.
- Scan the QR code with "your mobile phone"



Scan the QR code on the switch screen
- Click here to control the device directly , confirm the corresponding relationship



Change icon
Edit button name
Select the room where the device is located
Add room

Finally, be sure to click "Save", otherwise it will not be configured
- The switch will set up connection automatically and it normally takes 5~30 seconds to complete. Once completion, it will return to the main interface




WiFi connecting...


Bedroom

9. How to set a password to enter the setting interface?


1. Click "Setting"

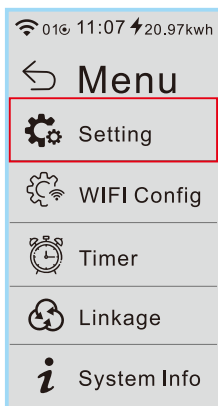

2. Swipe up, click "Engineer Option"

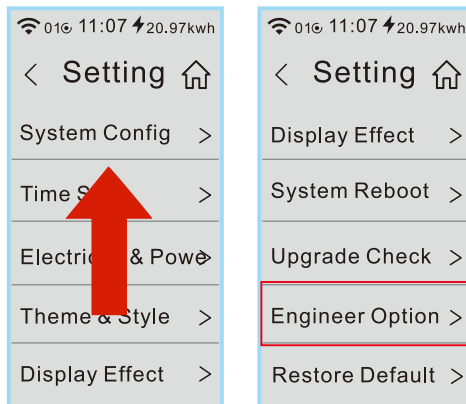


3.

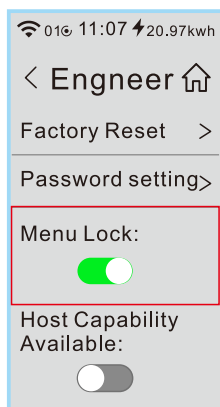


ON requires a password

OFF no password

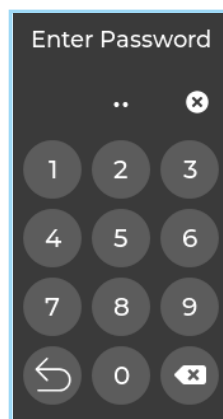


10.How to set schedule and timer?


1. Click"Timer"

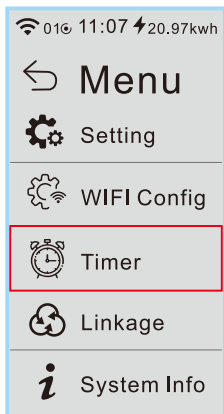


2. Click"Timer"

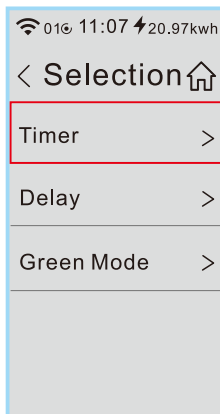

3. Up to 8 groups

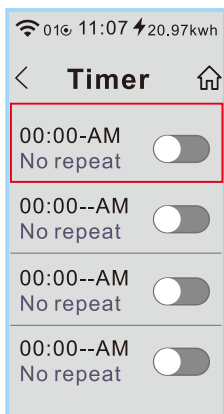


4.

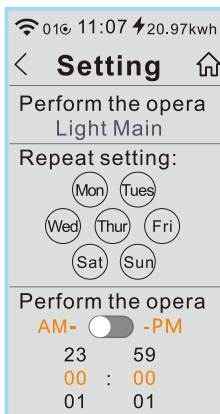


11.How to set up power statistics?


1. Click "Setting"

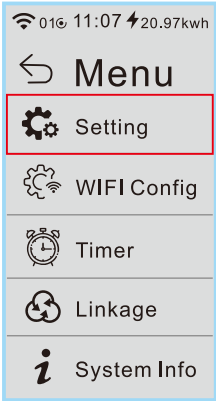


2. Click "Electricity & Powe"

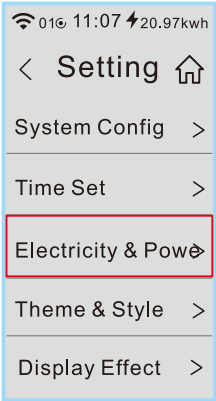

3.

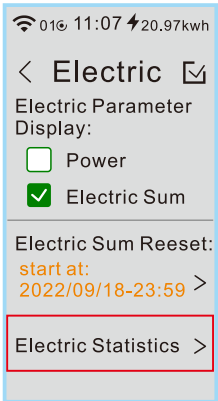

4.

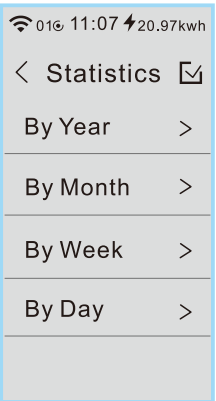


5.



12.How to set the button name and icon?

1. Long press for 3 seconds

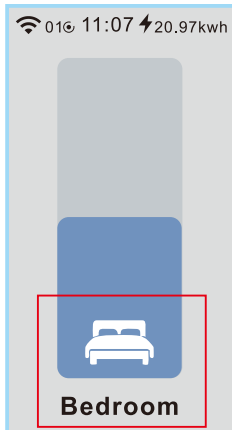

2. Name Setting




3. Icon Setting




13.How to change the button color?


1. Click"Setting"

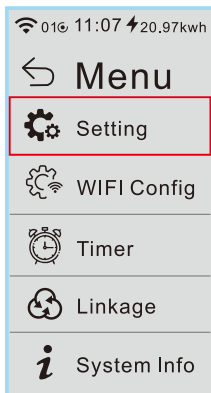


2.

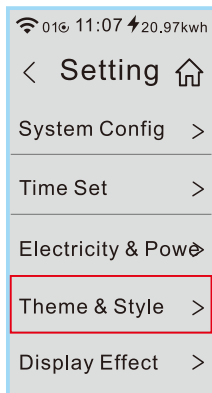


3.

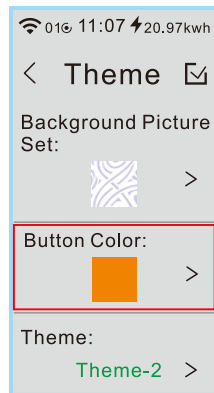

4.

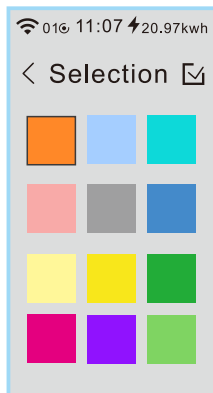


5.

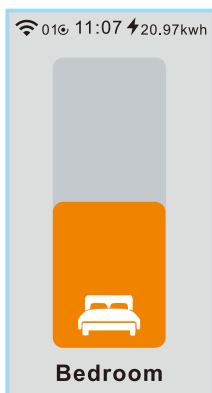


14.How to change the switch background map?


1. Long press for 3 seconds

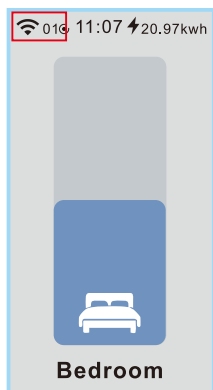

2. Click "Setting"

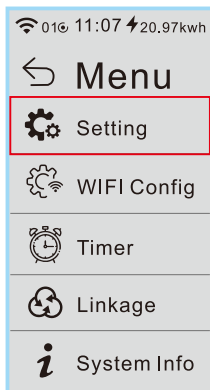

3.

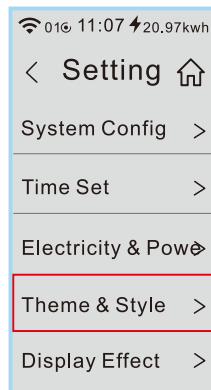


4.



5.




6.

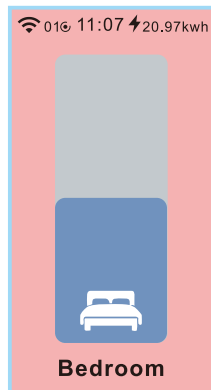


15. How to set the sensing radar working mode?


1. Click "Linkage"

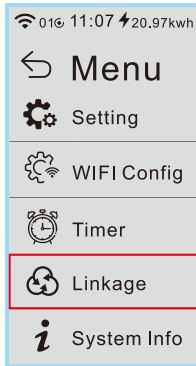

2.

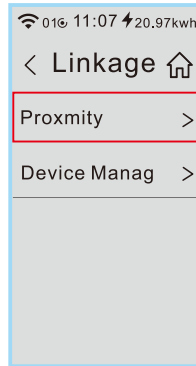


3.

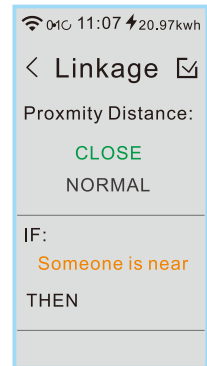


16.How to change the screen brightness?


1. Click "Setting"



2.



3.




Adjust the brightness when screen is activated

Adjust the brightness when screen is standby

Auto-standby time

17.How to set up energy -saving mode?


1. Click"Timer"

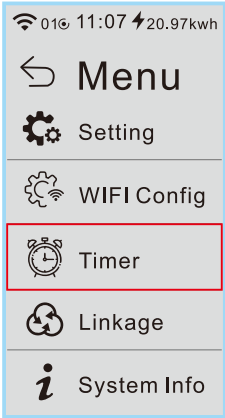

2.




3.


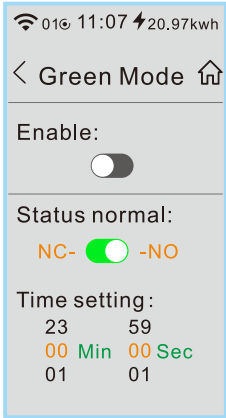


18. How to upgrade firmware?

1. Click "Setting"

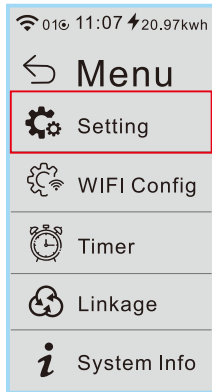

2. Swipe up, click "Upgrade Check"

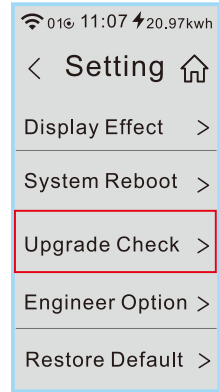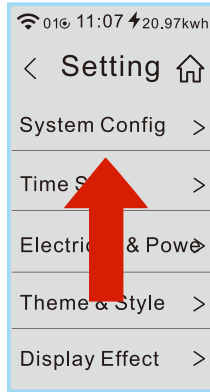


3.




19. How to set up the state before power outage?


1. Click "Setting"

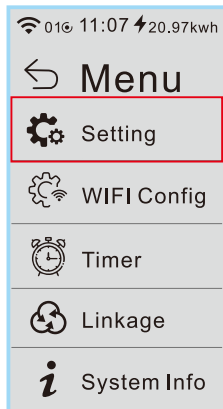

2.



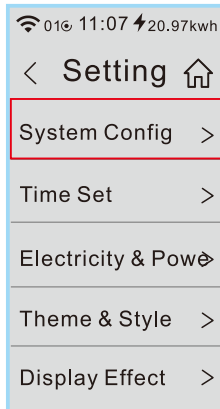


3.

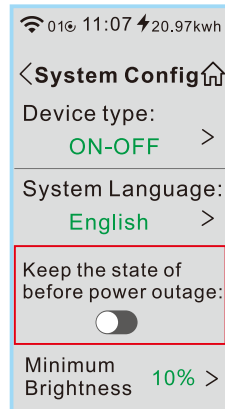

20.How to restore the factory setting?

1. Click "Setting"
2. Swipe up, click "Restore default"

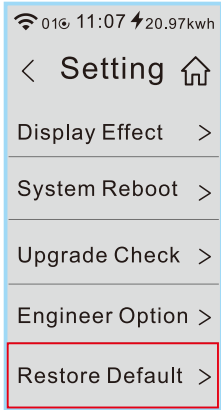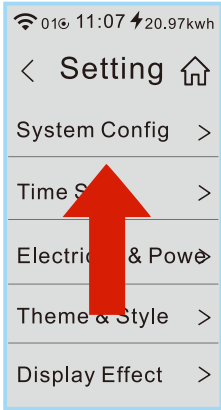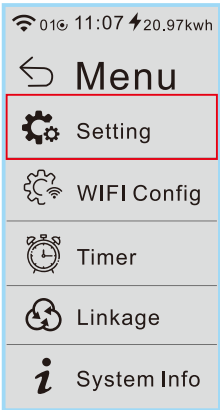


3.




21. How to set 2/3 way switching control setting?


1. Purely DIY without professional installation or physical wiring. Connect any 2 switches in the same type.

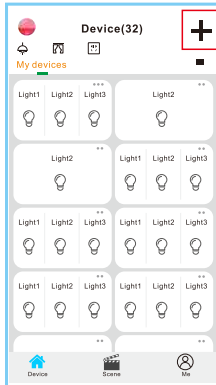

2. Choose L8 mutual control

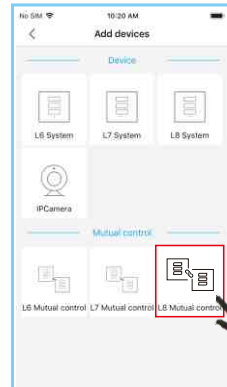

3. Create mutual control group , click “save”

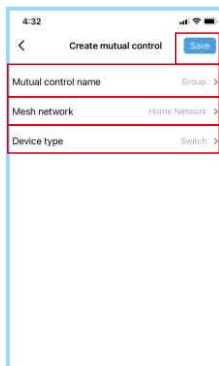

- Create mutual control name (for your own identification)
- Select MESH network
- Mutual control device type (Switch, Dimming, Curtain)

4. The red circles indicate the switches are selected for current mutual control. The black circles indicate the switches are used by existing mutual controls. Save the settings before exit.




22.How to connect Alexa?


1. Open the Smart Living APP



2. Name each button in advance



3. Click on 'Me' > Click on 'Alexa'




4.




5.



6.



7. After the name change is successful, please try to say Alexa to "Alexa , turn on Bedroom light"




23.How to connect Google Home?


1. Open the Smart Living APP



2. Name each button in advance




3. Click on 'Me' Click on 'Google Assistant'




4.




5.



6.



7. After the name change is successful, please try to say Google home, "OK google, turn on Bedroom light"



24. Please contact us for any help

 WhatsApp:
+8619924468370

 Email:
lanbonsv@foxmail.com

25. Manufacturers

 Shenzhen Lanbon Hi-Tech Co., Ltd.

 lanbon@lanbon.com

 <http://www.lanbon.com>

 3rd Floor, ZhanRun Business Building,
Yunfeng Road NO.1, Queshan Industrial Area,
Dalong, Longhua district, Shenzhen, China

